Polyform[®] HL2 Heavy Duty buoy



Proudly made by The Originator of Modern Plastic Buoys

POLYFORM® OF NORWAY

The POLYFORM[®] HL-2 is a supreme heavy duty buoy with an extra strong pre-made injection molded ropehold. The buoy and the ribreinforced ropehold are unified through the in-house developed rotomolding WELCOTEC technology. The ribbed and bullet shaped POLYFORM $^{\rm m}$ HL buoys are designed to reduce drag. Under some conditions the drag can be reduced by up to 80% compared to spherical buoys. The HL-series are made from our unique blend of high class tough, flexible vinyl materials. The buoys are resistant to all weather conditions. The HL-series low drag buoys are used all over the world for different applications, such as in commercial fishing as net buoys, buoys for long lines, lobster and crab pots, markers and as heavy duty fenders.

Available in various colours. **Polyform AS**

Polyform AS is a world leading manufacturer of buoys fenders and floats, and the originator of the modern inflatable plastic buoy. The company is registered in Norway and situated in Ålesund at the north-western coast of Norway, and benefits from being located in one of the world's most innovative maritime environments. The product range of Polyform AS consists of:

• Inflatable buoys and fenders made from soft Vinyl plastics.

• Purse Seine Floats, buoys and marina fenders made from BACELL closed cell foam.

• Hard-shell buoys and pontoon floats made from PE and filled with foam



Product information


| Article number | HL2 |
|---------------------------|---------|
| Diameter (max recomended) | 300 mm |
| Height (max) | 620 mm |
| Weight (nominal) | 2,1 Kg |
| Eye diameter for ropehold | 22 mm |
| Valve type | V10 |
| Gross volume | 30,5 L |
| Recommended max load | 18,5 Kg |

Technical information

| Breaking load for ropehold | 800 kp | |
|--|----------|--|
| Buoy body material description | | |
| Hardness, shore A | 66 | |
| Tensile strength | 13,9 MPa | |
| Elongation at break | 587% | |
| Cold flex temperature | -33°C | |
| Recommended max temp. | 40°C | |
| Temp. not to be exceeded | 50°C | |
| Specific gravity | 1,17 | |
| Body and Ropehold made from PVC. | | |
| No use of CFC. Cadmium free. | | |
| Made by Welcotec production technology | | |
| | | |



Stress (MPa) PVC Material

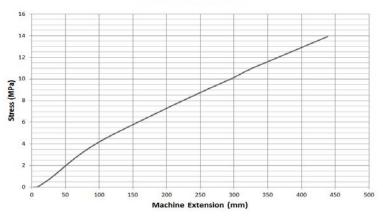

this data sheet, please allow for a deviation of not less than +/-5%. The illustration may deviate from the actual product.



Contact AMI for all Polyform requirements across leisure, commercial or offshore. Visit https://www.amisales.com.au/contact-us/ for your nearest branch.